




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 12/26, 12/24</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/22492</b>
			(43) International Publication Date: 6 May 1999 (06.05.99)
(21) International Application Number: PCT/EP98/06716 (22) International Filing Date: 22 October 1998 (22.10.98) (30) Priority Data: 197 46 904.3          23 October 1997 (23.10.97)          DE (71) Applicant (for all designated States except US): TELEFON- AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): NORDENSTAM, Yn- gve [SE/SE]; Smultronbacken 8, S-135 62 Tyresö (SE). TJÄDER, Johan [SE/SE]; Lidnersgatan 38, S-754 42 Upp- sala (SE). (74) Agents: VON FISCHERN, Bernhard et al.; Hoffmann . Eitle, Arabellastrasse 4, D-81925 Munich (DE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: TRAFFIC DATA EVALUATING APPARATUS AND METHOD FOR A NETWORK USING DYNAMIC ROUTING

## (57) Abstract

To provide an improved approach to traffic data evaluation in a network using dynamic routing there is provided a traffic data evaluation apparatus for a network using dynamic routing comprising traffic data collection means (12) to collect data with respect to a real traffic flow in the network. Further, the traffic data evaluation apparatus comprises a network modelling unit (14, 16) to model the network through a virtual network having virtual links without capacity restrictions imposed thereon. Still further, there is provided a network load evaluation means (18) to map the real traffic flow onto the virtual network assuming optimal routing and to compare the capacity used for each virtual link with the capacity assigned thereto. Thus, it is possible to draw conclusions on the network load by real network measurements also for a network using a dynamic routing protocol.

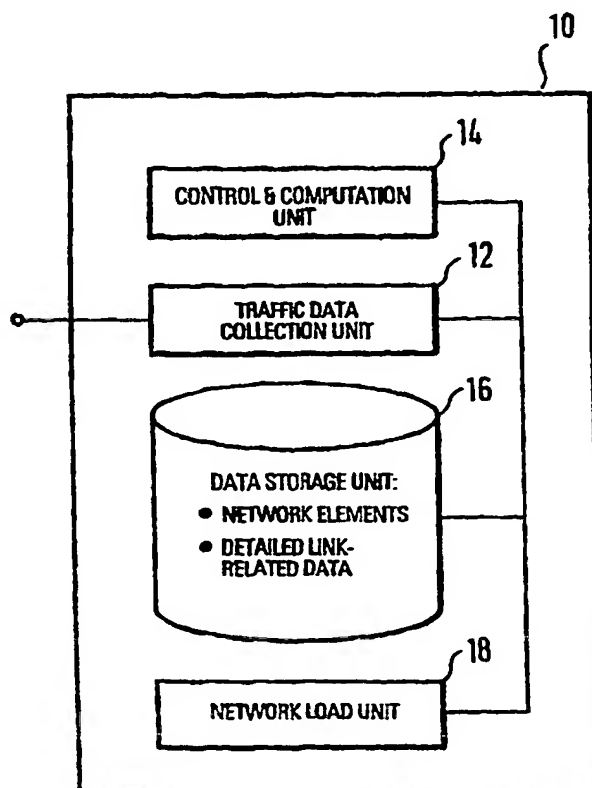

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**Traffic Data Evaluating Apparatus and Method for a  
Network Using Dynamic Routing**

10

**Field of Invention**

The present invention relates to a traffic data  
evaluating apparatus and a related method, and in  
15 particular to a traffic data evaluating apparatus for a  
network using dynamic routing.

**Background of Invention**

20 Digital communication networks of the future will largely  
be based on networks using dynamic routing, e.g. networks  
using the asynchronous transfer mode ATM technology.  
Telecom operators today invest heavily on such new  
technology. Here, it is important that network operators  
25 have tools to insure that the own network works  
efficiently and further tools to predict where new  
investments in the form of extensions of the network  
should be realized.

30 Fig. 9 illustrates the principle of timesharing  
multiplexing where the complete message is split into  
packets. Thus, when two or more senders deliver packets  
to a router, the router can transmit both senders'  
information on the same physical circuit by re-sending  
35 one packet from the first, then one packet from the  
other, and so on. In normal circuit switched networks,

2

5 only one of the senders could transfer information at one time. Now the circuits are instead only perceived at a higher level of abstraction, i.e. virtual circuits. The path of every connection's circuit may be determined using dynamic routing.

10

As shown in Fig. 10, the packets usually consist of a header, which contains all information necessary in order for the network to transmit the packet through the net, a body which consists of user data and a cyclic redundancy check code, CRC, which is used for bit transmit error detection.

In packet switched networks these packages may arrive at destination in disorder. The connection is here maintained at a higher level of abstraction with advanced buffering methods, so that the end user perceives a connection, where there is in fact none.

However, in circuit switched networks, as ATM, the route through the network is determined in advance, possibly using dynamic routing. Hence, all packets are guaranteed to arrive in correct order. Also, since the route in ATM networks is determined and relayed to the nodes in advance, the packets need not contain all the information usually found in packet headers, because the node already knows how to switch cells on a certain connection. The header size of the packets can therefore be reduced and hence, they are called cells. By the same reason, the routing algorithms can be much simplified, which reduces the amount of computational power needed to perform the

5 switching. Because of the high transmission reliability in ATM-networks, cells do not have a CRC.

Fig. 11 shows an ATM network as typical example for a network using dynamic routing. Here, the principle  
10 components are the ATM adaptation layer AAL, statistical concentrators, ATM switches, transmission links, and control computers. The statistical concentrators and ATM switches contain smoothing buffers to temporarily store arriving data packets that cannot be immediately  
15 delivered because in the case of a concentrator, data packets generated by active users arrive in parallel, but are delivered to the output sequentially, or in case of a switch, several data packets may arrive in parallel for the same output, but are delivered to that output  
20 sequentially. Thus, as a function of time the number of data cells stored in and transmitted by any smoothing buffer will rise and fall in accordance with end user data packet generation patterns.

25 Further, the control devices limit the traffic intensity on the various links such that quality of service QoS guarantees are maintained. For this reason, prior to receiving service, a given user must request a connection to the intended receiver and then the admission  
30 controller checks on the route found through the network. If such a route can be found, virtual connection numbers are assigned and the routing tables in the intervening switches are provided with instructions for routing of each ATM data cell bearing the right virtual connection  
35 number within its cell header. The user is then free to communicate over this new established virtual connection.

5

In addition, as shown in Fig. 11, the AAL is responsible for converting a user's data packet message into a sequence of ATM data cells and for re-assembling ATM data cells into complete messages. Here, a message may be an individual data cell, e.g., data or image, or a continuous bit stream, e.g., voice or video.

In particular, it should be noted that some networks . . .  
using dynamic routing like the ATM communication system  
15 are virtual connection oriented networks where resources  
are not assigned on an exclusive basis, but rather are  
statistically shared among multiple connections.

Overall, these networks rely on virtual paths to segregate the collection of virtual connections into independently manageable groups. This concept is vital for creation of a viable admission policy since it decomposes a large job into independent sets of much smaller tasks.

25

Also, networks using dynamic routing provide for a route choice in advance. Here, the resources for every connection are negotiated before the establishment of the connection itself. The result of this negotiation then  
30 determines the transfer capacity of the connection, i.e. bit rate or bandwidth demand and the quality of service.

Apparently, there is reserved an amount of transfer capacity, bandwidth, during the establishing of a  
35 connection. However, when using services with varying bit rate the efficiency may be raised by the statistical

5 multiplexing approach where not the full amount of capacity needed to cope with every eventuality is allocated, but it is instead assumed that bandwidth may be "borrowed" from other connections.

10 Thus, in considering the aspect of resource allocation in a network using dynamic routing, different factors such as quality of service, usage parameter control, connection admission control, and statistical multiplexing, should be taken into account. The parameter

15 quality of service considers the demands on the quality of a connection. Here, a connection in the network may be established such that cells are transferred within a certain time, i.e. restriction on cell delay, that the transfer does not vary too much, i.e. restriction on cell

20 delay variation, and that cells are not lost within the network, i.e. restriction of cell loss. Further, usually within networks using dynamic routing there exist no limits on the amount of cells that a user may produce. Nevertheless, this amount of produced cells may be

25 controlled through the specification of the usage parameter.

Still further, connection admission control relates to a function which in the first phase of connection

30 establishment decides whether or not there exists sufficient resources to establish a new connection in the network. Connection admission control considers whether the connection may be established with the requested bandwidth and quality of service while simultaneously

35 upholding the quality of service for already established connections.

5

As already outlined above, statistical multiplexing relates to a sharing of bandwidth between different connections in a network using dynamic routing so as to avoid to allocate bandwidth according to peak levels for the different connections.

10

Taking into account the above principles, in a network using dynamic routing, finally a route in the network is determined through which the cells may be transported before the establishment of the actual connection. Thus, as routes are only established on demand, no advanced time consuming routing is required in the network nodes and cells may be switched in a simple way.

15

As shown in Fig. 12, in a network using dynamic routing there may exist many alternative routes between two nodes. In the examples shown in Fig. 12, the possible routes between node 1 and node 5 are route A running over nodes 1, 2, 3, 5, route B, running over nodes 1, 2, 7, 3, 5, route C, running over nodes 1, 2, 3, 4, 5, and route D, running over nodes 1, 2, 7, 3, 4, 5.

20

25

As is apparent from this example, the problem for the operator of a network using dynamic routing is to determine the best route. However, independent from the way the route is established, it will finally be established according to the above-referenced criteria. While simple static routing protocols will always choose the same way for every attempt to establish a certain connection dynamic routing protocols take into account the actual traffic picture that is gathered through

30

35



5 intercommunication of network elements. One such protocol  
being supported by the ATM forum is the PNNI Private  
Network to Network Interface. This protocol handles the  
detection of neighbors and links, the synchronization of  
topology information, the flooding of topology  
10 information, peer group leader elections, summarization  
of topology state information, and a construction of  
routing hierarchy, respectively.

In a network with many nodes, the work load needed if  
15 every node in the network would have to hold information  
about every other node in the network would be  
overwhelming. Thus, according to the PNNI routing  
protocol, this information is handled in a hierarchical  
fashion. Several nodes gathered together in peer groups  
20 and an election process determines a peer group leader  
which interacts with other peer group leaders. If  
necessary, these peer group leaders will cluster to form  
new higher peer groups which will again have a peer group  
leader, as outlined above.

25 Further, between the nodes in a peer group, topology  
information is exchanged so that every node in the peer  
group knows about the state of its own peer group. Also,  
the peer group leader communicates this information to  
30 higher levels of hierarchy where this information is  
gathered in the network elements. Thus, dynamic routing  
protocols allow to distribute load information to the  
network elements that are informed about the status of  
other elements. Based on this information, the best  
35 routes are then calculated and stored, e.g., in a  
designated transit list DTL.

5

Further, the dynamic routing protocol providing information on the load status in the network allows to choose the route which in the perspective of the network operator seems to be optimal not only based on the actual traffic load, but also according to predefined operated preferences.

Figs. 13 and 14 show further details of traffic measurements. In particular, Fig. 13 is related to short term traffic variation and Fig. 14 is related to traffic variation during a day.

As is shown in Fig. 13, the number of connections via a link typically varies in a complex manner, as individual connections are established and removed. If this random variation is smoothed out by taking a running average, the number of calls in progress is found to vary during the day, e.g., according to the example shown in Fig. 14. Usually, there are very few connections during the night and the number of connections rises as people go to work and it reaches a maximum by the middle of the morning. Further, initially it falls at midday as people go to lunch and then rises again in the afternoon. Finally, it decreases as people go home from work and there exists a further peak in the evening as people make social calls. As shown in Fig. 14, a period of an hour, which corresponds to the peak connection load is called the busy hour and here is from 10 a.m. to 11 a.m.. When dealing with ATM networks different traffic types may have different behaviour.

5 While in a network where a routing is of a static nature  
it is possible to make straight forward measurements on  
the traffic flow in the network, and thus to draw  
conclusions in terms of needed extensions/changes in a  
network to the contrary with a connection oriented  
10 dynamic routing protocol such as the PNNI protocol, it is  
hard to draw conclusions from measurements on the actual  
traffic flow in the network as it lies in the nature of a  
network using dynamic routing to try and overcome hidden  
bottlenecks and potential high load situations in the  
15 network by dynamically changing the routing situation.

Thus, in a network using dynamic routing it must be taken  
to account that the routing protocol is operating to  
adjust routing selections according to new connections to  
20 avoid highly loaded links. Further, while the above  
referenced PNNI-protocol will almost certainly be used in  
commercial networks using dynamic routing, only few or no  
studies exist on how this protocol behaves in stress  
traffic situations.

25 Another problem that occurs is that under certain  
circumstances a network using dynamic routing may  
oscillate in a way that peak loads swing to and fro  
between different parts of the network. Such a situation  
30 will lead the overload signals to wrong places in the  
network.

Still further, the question arises whether the current  
dynamic routing protocols lead to the most efficient  
35 networks as they are only able to effect the load

10

5 situation at connection establishment time and take only into account the load situation in that moment.

Due to the deficiencies outlined above, net dimensioning becomes a very difficult problem. The reason for this is  
10 that user needs vary with time and new services pop up, new subscribers are added, old subscribers move, new transmission technology is mixed with old infra structure. Only in case the operator of a network using dynamic routing has reliable data on the network load and  
15 thus a reasonable projection thereof into the future, he may build a network having the right size and being provided with a little pro-activeness according to future needs.

## 20 Summary of the invention

In view of the above, the object underlying the present invention is to provide an improved approach to traffic data evaluation in a network using dynamic routing.

25

According to a first aspect of the invention, this object is achieved through a traffic data evaluation apparatus for a network using dynamic routing, comprising traffic data collection means to collect data with respect to a  
30 real traffic flow in the network, network modelling means to model the network through a virtual network having virtual links without capacity restrictions imposed thereon, and network load evaluation means to map the actual traffic flow onto the virtual network assuming  
35 optimal routing and to compare the capacity used for each virtual link with the capacity assigned thereto.

5

Further, according to a second aspect of the present invention, this object is achieved through modelling the network with a virtual network having no capacity restrictions imposed on the virtual links thereof, superimposing real traffic on the virtual network assuming optimum routing, and comparing the used capacity with assigned capacity for each virtual link.

15

Thus, according to the invention, the use of a virtual model of the network where each of the virtual links comprised therein may correspond to one or more real links between a pair of nodes and can carry an infinite amount of virtual traffic, allows for a traffic flow evaluation that is not effected by the fact that dynamic routing is constantly changing the conditions. Through the use of a virtual network it is possible to draw conclusions on the network load by real network measurements.

25

Further, the inventive approach may be used in any routing condition or any connection oriented network where the routing is changing in an unpredictable fashion by dynamic routing or through advanced network management functions.

30

Another advantage of the invention is that while a certain capacity is assigned to virtual links, no capacity restriction is imposed thereon, so that the traffic flow evaluations are carried out using the optimum routing criteria, so that the resulting picture on the network load indicates a real picture of the

35

5 network load where a load may be well over 100% of the  
capacity of the real link. Thus, it is possible to  
identify links which would have had a high load, but  
where a dynamic routing protocol would have compensated  
for the high load in the real world. This gives the  
10 operator of the network time to eliminate the bottleneck  
by extending the network before the service to the  
customers is affected. Also, the traffic data evaluation  
approach according to the invention allows to monitor the  
traffic flow in a relative simple way, and further to  
15 simplify the evaluation of the efficiency in the network,  
the control of availability, and the control of quality.

According to a preferred embodiment of the invention, the  
traffic data evaluation is based on a post-processing  
20 step of data collected with respect to the real traffic  
flow in the network using dynamic routing. Here, the  
advantage is that according to the invention processing  
is based on real traffic situations that reflect what  
really took place in the network, and that this allows  
25 for the ability to compare the actual line of events with  
a theoretical analysis. The Call Admission Control will  
only consider the requested bandwidth allocation, not the  
real use of bandwidth (since this is impossible to tell  
in advance). Therefore this invention also takes into  
30 account the allocated bandwidth when post-processing Call  
Detail Record data. In this particular case, an advantage  
of the invention is that one can easily identify  
potential bottlenecks due to a very high virtual load  
being consistant over time.

35

5 According to yet another preferred embodiment of the invention, the data with respect to the actual traffic in a network is collected via a simulation of the network. This allows to flexibly evaluate a planned network with an arbitrary number of nodes and links. Also, a load  
10 capacity may be freely allocated to each link.

By measuring the amount of bandwidth that is actually in use, it is possible to determine how well the statistical multiplexing works. Such measurements may give even  
15 better results when the regular measurement of quality of service parameters is standard.

According to yet another preferred embodiment of the invention, the result of the traffic flow evaluation is  
20 used to draw conclusions in terms of needed extensions and changes of the network, respectively. Thus, it is possible to plan further extension of a common network in the future, e.g., a broad band integrated services digital network of which the basic technology again is  
25 the asynchronous transfer mode outlined above. According to the invention, there is provided an improved basis for a decision of the insertion of new hardware into a network using dynamic routing such that the network operator may implement the network as efficiently as  
30 possible with lower costs and better performance. Also, changes may be suggested in terms of new bandwidth or links in the network, and thus, the resulting load situation in the virtual network may be estimated still with the same real traffic data as input and still  
35 assuming the same routing criteria. Thus, the traffic data evaluation approach according to the present

5 invention allows to identify needs to build up new capacity according to future needs.

Still further, according to yet another preferred embodiment of the invention, the result of the inventive traffic data evaluation approach may be visualized for an operator by displaying the virtual network with digit on procential load compared to the real network capacity with respect to every link and direction. Further, this could be displayed together with related real time measurements for the corresponding moment. Also, according to the invention it is possible to continuously measure and monitor the load fluctuations of the virtual load as well as to measure individual traffic classes/types to monitor their individual contribution.

20 Still further, according to yet another preferred embodiment of the present invention, the post-processing of actual traffic flow data where unsuccessful connection are taken into account is also possible.

25 Finally, according to yet another preferred embodiment of the invention, another possibility is to monitor all actual traffic that is passing a certain link, i.e. possibly selected for its high virtual load, and then display all load in the network generated from this selected traffic.

30



## 5 Brief Description of Figures

Preferred embodiments of the present invention will now be explained with reference to the attached drawings in which:

10

Fig. 1 shows a schematic diagram of a traffic data evaluation apparatus according to a first embodiment of the invention;

15

Fig. 2 shows a schematic diagram of a traffic data evaluation apparatus according to a second embodiment of the present invention that is realized with a client server structure;

20

Fig. 3 shows a schematic diagram of the network load evaluation unit shown in Figs 1 and 2, respectively;

25

Fig. 4 shows a schematic diagram of a network load simulator according to the present invention to be used for the generation of real traffic data;

30

Fig. 5 shows a result of the traffic data evaluation approach according to the present invention with respect to each link in a virtual network for every direction;

35

Fig. 6 shows a result of the traffic data evaluation approach according to the present invention with respect to each virtual link in the

5           virtual network and each direction,  
            respectively, where also the impact of non-  
            serviced requests for connection is considered;

Figs. 7a - 7e

10           show possible extensions of network using  
            dynamic routings according to different network  
            topologies;

Fig. 8       shows the application of the traffic data  
15           evaluation approach to a hierarchical network;

Fig. 9       shows the principle underlying networks using  
            circuit switching and further the principle  
            time sharing multiplexing;

20           Fig. 10   shows a typical packet format;

Fig. 11      shows elements of an ATM network as example for  
            a network using dynamic routing;

25           Fig. 12   shows a typical example for multiple routes  
            through a network using dynamic routing;

Fig. 13      shows a short term traffic variation on a link;  
30           and

Fig. 14      shows a long term traffic variation on a link.

## 5 Description of Preferred Embodiments

Fig. 1 shows a schematic diagram of a traffic data evaluation apparatus 10 according to a first embodiment of the present invention. This traffic data evaluation apparatus comprises a traffic data collection unit 12 that collects data with respect to an actual traffic flow in a network using a dynamic routing protocol. Further, the traffic data evaluation apparatus 10 comprises a control and computation unit 14 that is connected with both, the traffic data collection unit 12 and a data storage unit 16, wherein information on network elements and detailed link related data is stored. This control and computation unit 14 is also connected to a network load unit 18 wherein computation results according to the estimated network load on the virtual network are, firstly, visualized using a display, and secondly, the structure of the virtual network to model the network using a dynamic routing protocol may be modified.

25 In the traffic data evaluation apparatus shown in Fig. 1  
the traffic data collection unit 12 allows to collect a  
plurality of data with respect to the actual traffic in  
the network using dynamic routing. The reason for this is  
that in the separate network elements there are a number  
30 of counters that are accessible through standardized  
interfaces, e.g., SNMP simple network management protocol  
in an ATM network. Here, an automatic tool that regularly  
fetches values may be constructed in case the  
functionality of the network element and the simple  
35 network management protocol is available.

5 One particular option to collect data with respect to the actual traffic in the network using a dynamic routing protocol is the measurement of quality of service QoS-parameters which are effected by the load and therefore are to be measured regularly. One such parameter is the  
10 cell transfer delay, CTD. However, the problem with the measurement of this parameter is that two clock signals are needed, i.e. one at the source and one at the destination, and that both must be exactly synchronized. Here, the synchronization is to be carried out in the  
15 nanosecond level to make the data useful. However, to get two clocks synchronized on this level, complicated measures are necessary which today require advanced equipment.

20 Another solution is to let the cells return to the source node and divide the cell transfer delay by two. Then it is possible to measure the cell transfer delay with only a single clock signal. However, the problem with this facilitated measurement is that the cell transfer delay  
25 CTD from A to B is not necessarily equal to the one from B to A, as it depends on the actual traffic load that differs from one direction to another.

Another option with respect to QoS parameters would be  
30 the measurement of cell delay variation and cell loss that are somewhat easier to measure. However, the cell delay variation CDV and the cell loss CL are not as clear as the cell transfer delay CTD when it comes to the evaluation of the network load and therefore are not as  
35 attractive as the cell transfer delay CTD for the traffic load measuring.

5

Further, a preferred way to implement the traffic data collection unit 12 shown in Fig. 1 is to use a call detail record, CDR, that is stored for every attempt to establish a connection. The call detail record CDR holds information about originating and terminating node, time and other aspects such as used and allocated bandwidth of a connection. As call detail records CDR are mainly used for billing, the network administration system gathers these call detail records CDR in a robust and stable way. Here, call detail records CDR are, e.g., stored in the network elements and then transmitted via a transfer protocol such as FTP to billing centers with large data bases. Thus, these data bases may provide exact information about the real traffic load in the network using a dynamic routing protocol. This exact information may be transferred to the data storage unit 16 in the traffic data evaluation apparatus 10 so that it is really accessible for further network load evaluation processes.

Using the information available from the data storage unit 16 the control and computation unit 14 may then carry out the allocation of virtual bandwidth in the virtual network used to model the real world network using a dynamic routing protocol. Here, the analysis carried out by the control and computation unit 14 in view of further extensions of the network can not only rely on measurement of the real traffic load, but there is also a need for a method that can see past the effects of the dynamic routing protocol. While usually performing simulations for such a network might be considered to analyze the actual traffic flow in the network, such an

30  
35

5 approach does not give any apparent clues as to where it is best to increase bandwidth. While the network operator may carry out intelligent guesses and then verify this through additional simulation runs, he actually is in need of a system that points out potential bottlenecks.

10

For this reason, the control and computation unit 14 according to the invention and shown in Fig. 1 carries out a post-processing of call detail records CDR stored in the data storage unit 16. While Fig. 1 shows only a single data storage unit 16, here it should be noted that also a plurality of such data storage units may be provided for to cope with the large amount of data stored in the data storage unit 16.

20 Thus, according to the present invention the advantage is achieved in that the traffic data evaluation is carried out on real traffic situations. The data storage unit 16 reflects what really took place, and thus according to the invention it is possible to compare the actual line of events achieved through real measured traffic load data with an analysis based on call detail record information.

As already outlined above, it is important to note that the analysis only takes into account the bandwidth allocated, but not the bandwidth used. The reason for this is that the allocated bandwidth effects the connection admission control program that decides whether a new link may be established in the network or not.

35

5 Further, the present invention considers networks using a dynamic routing protocol such as the ATM network. Such routing protocols choose the routes in the network which are currently the best choice given the state of the network at that time, however, it is not certain that  
10 this is the best route in general terms. What is the best route is generally not unique, but for an optimal dynamic routing protocol the best route would be the route according to a completely unloaded network.

15 Therefore, in the control and computation unit 14 shown in Fig. 1 a calculation is carried out with respect to a virtual network modelling the real network such that all connections are routed along the best route possible without concern for the load situation at establishment  
20 time. A typical result of this approach is shown in Fig. 5. While most links in the virtual network do not exceed the available capacity, an overload phenomena may be observed from node 3 to 5 according to 120% and from node 7 to node 3 according to 159%.

25

The particular algorithm executed by the control and computation unit 14 relies on the data storage unit 16 and the detailed related data according to extracted call detail records CDR for connections established in the  
30 real network. From the call detail record CDR the control and computation unit 14 extracts information about the source node, the destination node and the bandwidth. The best route is calculated and then the connection bandwidth demand is added on the links it passes. The  
35 result is a table with accumulated bandwidth demands that

5 may then be presented as a map, as shown in the following.

This approach may be used to unveil potential bottlenecks in the network by identifying links with a very high load  
10 consistant over a longer time period. Also, it is noted that permanent and semi-permanent connections sometimes allocate large parts of the total capacity and that these connections also have call detail records CDR. However, as these connections stay up for a very long time it  
15 becomes pointless to consider them as outlined above. Thus, according to the invention the best route is calculated given the set of permanent and semi-permanent connections at the moment as prerequisites.

20 The difficulty associated with this analysis is that there may be two or more equivalent best routes. Here, according to the invention, all load is allocated on only one of these best routes that then gains too much virtual load. To compensate for this, according to the invention,  
25 there exist several alternatives that may be carried out by the control and computation unit 14:

1. Distribute the connections evenly on the alternatives. This is a simple and intuitive  
30 approach, however, not as trivial as it sounds. Firstly, there is no self-evident way to split the connections between these alternatives and, secondly, it is not self-evident that an even distribution gives the optimal analysis result.



- 5    2.    Distribute the connections randomly: This is another  
simple and intuitive alternative.
3.    Finally, according to the invention the optimal  
routing analysis is found by trying different  
10    distribution solutions in a search.

While in the above it was assumed that all connections  
are routed along the best route possible, a further  
option to consider multiple routes is to focus on the  
15    originating node, the terminating node, the connection  
and allocated bandwidth of a connection, respectively.  
Thus the traffic is superimposed on a "virtual" network  
model where links corresponding to one or more real links  
according to Fig. 5 between a pair of nodes can carry an  
20    infinite amount of virtual traffic, assuming the optimum  
routing criteria. This approach is even more effective in  
deriving an overload in the real network and, in  
particular, to compensate the dynamic changing of the  
routing according to the dynamic routing protocol.

25

Here, it should be noted that according to the second  
approach for the evaluation of the network load there may  
be established direct links between nodes that have no  
counterpart in the real network. Nevertheless, if this is  
30    the case, this would be a clear indication for possible  
changes and extensions of the existing networks.

The last component of the traffic data evaluation  
apparatus shown in Fig. 1 is a network load unit 18. This  
35    network load unit 18 is provided to display the result of

5 the network load analysis and to provide options for a network modification to the network operator.

A more detailed schematic diagram of the network load unit 18 is shown in Fig. 3. In particular, the network load unit comprises a display unit 20, a visualization unit 22, a network modification unit 24, and an I/O unit 26, respectively. The visualization unit 22 allows to display the different source and destination nodes, in particular in the form of a geographical map, a topology map, and bar charts, respectively. Thus, the visualization unit 22 handles the information about the node objects, link objects, and information objects, respectively.

20 Further, the network modification unit 24 is a self-contained component that handles movement of objects, labels and marking according to objects specified by the network operator via an I/O unit 26.

25 Within the network load unit 18 the graphical objects are displayed and linked to information objects. This solution allows to change the implementations of both the graphical objects and the information objects without disturbing the rest of the application. As already outlined above, the visualization unit 22 has different options to represent a network, the first being the display of nodes and links on a real world map and the second being the representation of the topology of the network according to the geographical disposition.

35 However, with the first form of representation, the network elements are not evenly distributed over the

25

5 display of the network load unit 18, in particular, they  
will be closer to each other in large cities and not so  
close in rural areas. Further, links usually do not go in  
straight lines from point-to-point but are bent in a  
complicated fashion. Also, eventually a great number of  
10 nodes will be clustered into groups.

These disadvantages may be overcome by providing a  
zooming function in the visualization unit. Also, an  
improved visualization of the network would rely on  
15 topology and ignore real world and geographic  
disposition. Also, according to the invention it is  
possible to cluster groups of nodes which are then  
represented as one unit. Heretofore, the visualization  
unit 22 uses the existing hierarchical system in dynamic  
20 routing protocols such as the PNNI protocol, and thereby  
generates a natural clustering of nodes into larger units  
that may then be zoomed out. This is particularly helpful  
in case a geographic visualization of the nodes is  
required. Another option to exploit hierarchical  
25 structures would be to use the PNNI peer groups necessary  
to re-configure the PNNI hierarchy.

The network modification unit 24 shown in Fig. 3 is  
particularly provided to evaluate different system  
30 configurations, that is to calculate how the load  
situation would change in case there is inserted another  
network element or link. Thus, the network modification  
unit 24 together with the I/O unit 26 provides  
functionality to add new nodes and links into both, the  
35 virtual network and the real network.

5 While in the above, a first embodiment of the present invention has been described with respect to Fig. 1, in the following a second embodiment using a client server architecture will be described with respect to Fig. 2.

10 As shown in Fig. 2, according to the second embodiment of the present invention, the functionality of the traffic data evaluation apparatus is split into two components, i.e. the server 28 and the client 30. As shown in Fig. 2, the server 28 comprises the control and computation unit  
15 14, the traffic data collection unit 12, and the data storage unit 16 already explained above with respect to the first embodiment. Thus, the server 28 handles the major computation tasks at a central position.

20 Further, as shown in Fig. 2, two interface units, e.g., TCP/IP sockets 32 and 34, are provided to connect the server 28 with a client 30 where the functionality according to the network load unit 18 is implemented in a decentralized fashion. Further, a main unit 36  
25 coordinates the different components in the client 30 and also the communication transfer between the server 28 and the client 30. The structure of the network load unit 18 and the client 30 corresponds to the one previously explained with respect to Fig. 3, and therefore  
30 explanation thereof will not be repeated here.

According to the client server architecture shown in Fig. 2, a server system provides data to the client. This data is passed, e.g., through normal TCP/IP sockets and access  
35 to the server may be limited by means of normal security solutions known from, e.g., the Internet. One example to

5 implement the server is to use the Erlang language, and the client may consist of , e.g., a JAVA Applet.

As shown in Fig. 2, the main tasks of the client 30 is to display the measured and analyzed data requested by the network operator. In case the client is written in the JAVA programming language, according to the invention it is possible to get access to all the advantages of the JAVA platform, i.e. a wide area of application for the client 30 and an implementation thereof with very low effort. Further, as shown in Fig. 2, the client 30 also comprises a charge unit 38 consisting of a chart and pull-down-menu. The menu controls the time interval for the charts which then are drawn according to pre-specified values.

20

Further, as shown in Fig. 2, the client 30 may comprise a warning unit 40. Usually, the network operator sees an analysis and measured values for a momentary picture of a continuous line of events. Further, most of these values will usually be within limits that must be considered normal. Thus, there is a need for a warning unit 40 that will be operated during normal operation such that the network operator may turn his attention to other things as the warning unit 40 will be activated if it detects unusual load tendencies. In other words, the warning unit 40 has to monitor measurements constantly in order to determine links with a continuous virtual high load. One object according to the present invention is to specify a threshold such that no warning is given by the warning unit 40 before reaching a specified level in number of times within a certain period.

5

As shown in Fig. 2 and already outlined above, the server is the part of the traffic data evaluation apparatus according to the second embodiment of the invention that provides the client 30 with data. Heretofore, the server 10 28 stores data collected by the traffic data collection unit 12 from network elements and call detail record CDR data bases in the data storage unit 16. This information that is needed from the network elements is allocated bandwidth per logical link where a logical link is a 15 number of physical links between the same two nodes. While momentarily information is only available for physical links this could easily change by creating a counter in the network element that works with the logic links or by downloading all values and adding them 20 together in the server 28. The reading frequency of the traffic data collection unit 12 should be set such that the workload in the separate network elements becomes very low and neglectable.

25 According to the present invention, the server 28 is based on the Erlang-platform. This is not necessarily the only platform for fast database and calculation operations, however, it allows for a very fast development time for systemx in Erlang.

30

As outlined above with respect to the first embodiment, the traffic data collection unit 12 according to the first and second embodiment collects data with respect to the actual traffic in the network using a dynamic routing 35 protocol. Another option shown in Fig. 4 and particularly suited for the evaluation for a great number of network

5 prototypes is the use of a network simulator. While in the following an example of a network simulator is described that provides all information necessary for the load evaluation, all enhanced versions of such a network similarly may be used according to the invention.

10

As shown in Fig. 4, the network simulator works with two units, the generating unit 42 and the terminating unit 44. The generating unit selects at random a source and destination node, then computes the best routes through the simulated network. Then, the generating unit tries to establish a connection along one of the best routes or, in other words, it tries to allocate bandwidth for this connection. In case it succeeds, the link is registered in a current link data base 46.

20

In the network simulator the routing is done dynamically and based on the allocated bandwidth on the links in the simulated network. Every link and route is given a rated value interaction proportion to the load and the length specified by the number of nodes in this route. Here it is of particular importance that the network simulator uses some kind of dynamic routing protocol.

25

Further, the terminating unit 44 shown in Fig. 4

30

traverses the current call data base 46 storing active cells. Every call has a randomly chosen length and when its time has passed, the call is removed from the current call data base 46 and a call detailed record is stored in the CDR database 48 of the network simulator. Here, the CDR database 46 does not store all the information a real

35

5 CDR database would do, but only the information that is important for the purpose of network load evaluation.

Thus, according to the invention there is provided a network simulator that simulates calls, routing and  
10 establishment procedures rather than bit or cell transport procedures. Also, the network simulator works on its own predefined network read from a configuration unit 50 without any restrictions on the number of nodes, number of links, or load capacities allocated to each  
15 link.

While in the above a typical result of the network load evaluation according to the present invention has been discussed with respect to Fig. 5, another option of the  
20 network load evaluation approach according to the invention is shown in Fig. 6.

In particular, according to the modified approach for traffic data evaluation in a network using dynamic  
25 routing, the attempts that did not result in the establishment of a connection are also taken into account. Usually, there are a number of reasons for a connection not to be established. One example would be that the number of attempts is so large that the network  
30 cannot handle all of them or that there only exists insufficient bandwidths to establish another connection.

While there is no dedicated way to tell how long a rejected connection would have been established and it  
35 must be assumed that some of the established connections have a history of the rejected attempts, according to the



5 present invention it is proposed to use a statistical analysis of variables like length, bandwidth and number of attempts needed to establish a call. Using this approach, one may estimate how attempts would have influenced the load picture in case they would have been  
10 accepted. Thus, according to this modified approach of the invention one achieves a clearer picture of the need of bandwidth, as shown in Fig. 6 with respect to bars indicating rejected calls.

15 Overall, while the traffic data evaluation according to the present invention preliminarily aims at easing the pressure on already existing links that shows signs of being potentially overloaded, the fact that a link is overloaded does not necessarily mean that there exists a  
20 need for more bandwidth on that particular link. Here, according to the present invention, there is provided a way to determine where the extension of an existing network is most reasonably built therein.

25 While in the above, the operation of the control and computation unit 14 has been mainly described with respect to call detail records CDR, respectively, another third option would be to determine whether calls according to the best route analysis would pass a certain  
30 link. Then, the frequency of source-destination node pairs is determined according to either the number of calls or rated for bandwidth demands. In case that one or many pairs of nodes are high frequent, one may consider the direct insertion of a link between these nodes to  
35 reduce a sort of quality reduction. If, on the other hand no particular path node is distinguished that way, one

5 might consider increasing the capacity of the overloaded links.

Overall, the traffic data evaluation approach according to the present invention allows to draw improved  
10 conclusions in terms of needed extensions and changes in a network using dynamic routing protocols. In particular, the invention provides for improved handling of varying needs where services pop up, new subscribers are added, or subscribers moved, a new transmission technology is  
15 mixed with old infra-structure. Here, the point is to avoid to build an under dimensioned network that cannot serve all the customers which will then leave for other operators. Further, a network operator will also try to avoid to build an over dimensioned network and the heavy  
20 investment costs related thereto which would eventually lead to increased customer bills and thus again to the loss of customers. With the traffic data evaluation approach according to the present invention, the efficiency of a network using a dynamic routing protocol  
25 may be increased by measuring loads on nodes in links regularly. Thus, one may get an opinion about such phenomena like busy hours, service mix, and so on. By storing and analyzing these data it is possible to predict the bandwidth needs in the nearest future that  
30 may effect the route selection in the network.

A number of different signs serves to indicate a mis-dimensioning of the network using a dynamic routing model. The check for over capacity in the network is very  
35 simple. In particular, in case there is over capacity, the figures for seized bandwidth will on average be low

5 apart from certain hours of the day, when the need for communication is temporarily higher. This phenomenon described as "busy hours" above is already known from telephony. To the contrary, under capacity displays itself in the opposite way, namely in constant high load  
10 values in the entire network, i.e. the net is then extremely overloaded. In this case, the load situation is seen in the same way as outlined above with respect to the different embodiments of the present invention. Another symptom that will display is the increasing  
15 number of rejected connections. However, according to the present invention this will be noticed since the call/link detail records are recorded even if the attempt to establish the connection fails.

20 Nevertheless, the case where the entire network gets overloaded will be very rare. More likely is the case that some separate links are overloaded. While the network with dynamic routing will then compensate this by routing new traffic on other parts of the network, this  
25 could eventually lead to other links being overloaded because of traffic that should have not been routed there in the first place. This is a typical case where the insertion of specific links may lead to an overall increased efficiency of the network using a dynamic  
30 routing protocol.

Fig. 7 shows examples for the extensions of an existing net through the insertion of further links therein. Examples are the extensions from partial net to full  
35 mesh, Fig. 7a, single bus to a multiple bus, Fig. 7b, partial ring to full ring, Fig. 7c, star to starring

5 topology, Fig. 7d, and tree to planar graph topology,  
Fig. 7e, respectively.

Further, as shown in Fig. 8, the traffic data evaluation  
approach according to the present invention may be used  
10 on different levels of abstractions in a hierarchical  
network. Such level could be the level of local  
exchanges, the level of regional exchanges and the level  
of national exchanges or switches, respectively. Further,  
the present invention is also well suited for links being  
15 related to the international exchange of data, e.g., via  
satellite links or submarine cables.

CLAIMS

5

1. Traffic data evaluation apparatus for a network  
using dynamic routing, comprising:
  - 10 a) traffic data collection means (12) to collect  
data with respect to a real traffic flow in the  
network,
  - b) network modelling means (14, 16) to model the  
15 network through a virtual network having  
virtual links without capacity restrictions  
imposed thereon, and
  - c) network load evaluation means (18) to  
20 c1) map the real traffic flow onto the virtual  
network assuming optimal routing, and  
c2) compare the capacity used for each virtual  
25 link with the capacity assigned thereto.
2. Traffic data evaluation apparatus according to claim  
1,  
characterized in that the network load evaluation  
30 means (18) maps the real traffic flow onto the  
virtual network through post-processing of data  
collected by the traffic data collection means (12).
3. Traffic data evaluation apparatus according to claim  
35 1 or 2,

- 5 characterized in that the traffic data collection means (12) collects the data with respect to the real traffic flow through measurement.
- 10 4. Traffic data evaluation apparatus according to claim 1 or 2,  
characterized in that the traffic data collection means (12) collects simulated data with respect to the traffic flow from a simulation device (42-50 ).
- 15 5. Traffic data evaluation apparatus according to claim 4,  
characterized in that the simulation device (42-50) comprises:
- 20 a) traffic generation means (42) to randomly select a source node and a destination node for a call in the network,
- 25 b) route computation means (42) to determine at least one best route through the network,
- 30 c) call database means (46) to store the selected best route according to the source node and destination node,
- d) call terminating means (44) to remove established calls from the call database means (46) and to share details with respect to the removed call in a call recording database (46).
- 35

5 6. Traffic data evaluation apparatus according to claim  
5,  
characterized in that the route computation means  
(42) calculates the at least one best route using  
pre-defined algorithms.

10

7. Traffic data evaluation apparatus according to one  
of the claims 1 to 6,  
characterized in that the traffic data collection  
means (12) is operated continuously.

15

8. Traffic data evaluation apparatus according to one  
of the claims 1 to 7,  
characterized in that the network load evaluation  
means (18) further comprises:

20

a) visualization means (22) to represent the  
network load at a display means (20),

b) input/output means (26) to specify  
25 insertions/exclusions of nodes/links into the  
virtual network.

25

9. Traffic data evaluation apparatus according to one  
of the claims 1 to 8,  
30 characterized in that it is implemented according to  
the client/server structure.

30

10. Traffic data evaluation method for a network using  
dynamic routing, comprising the steps:

35

- 5           a)    modelling the network through a virtual network  
              having no capacity restrictions imposed on the  
              virtual links thereof,
- b)    superimposing real traffic on the virtual  
10           network assuming optimum routing,
- c)    comparison of used capacity with assigned  
             capacity for each virtual link.
- 15   11.   Traffic data evaluation method according to claim  
          10,  
          characterized in that step b) is sub-divided into  
          steps
- 20           b1)   collection of data on actual traffic in the  
             network, and
- b2)   post-processing of data collected in step b1)  
             to achieve a load picture on the virtual  
25           network.
12.   Traffic data evaluation method according to claim  
          11,  
          characterized in that the collection of data  
30           according to step b1) is achieved through measuring  
          connection time, bandwidth, originating node, and  
          terminating node for all connections established via  
          dynamic routing.
- 35   13.   Traffic data evaluation method according to claim  
          11,



5 characterized in that the collection of data  
according to step b1) is achieved through simulation  
of connection time, bandwidth, originating node, and  
terminating node for all connections established via  
dynamic routing.

10

14. Traffic data evaluation method according to claim  
13,  
characterized in that the simulation step sub-  
divides into the following steps:

15

a) randomly selecting a source node and a  
destination node for a call in the network,

20

b) computation of at least one best route through  
the network,

c) establishing a call along the at least one best  
route,

25

d) inserting the call in a current call database,

e) traversing the current call database to remove  
established calls therefrom, and

30

f) storing details with respect to the removed  
call in a call recording database.

15. Traffic data evaluation method according to claim  
14,

5 characterized in that step b) to compute the at least one best route through the network is based on pre-defined algorithms.

10 16. Traffic data evaluation method according to one of the claims 10 to 15, characterized in that within the step b1) to collect data on real traffic also comprises the consideration of the impact of not-established connections on the load situation of the network  
15 through statistical analysis of the variables connection length, connection bandwidth and number of attempts, respectively.

20 17. Traffic data evaluation method according to one of the claims 10 to 16, characterized in that the step to collect data on real traffic is executed continuously to monitor fluctuations of the network load.

25 18. Traffic data evaluation method according to one of the claims 10 to 17, characterized in that the step to collect data on real traffic is carried out selectively with respect to individual classes/types of traffic.


30 19. Traffic data evaluation method according to one of the claims 10 to 18, characterized in that the load information derived through the comparison of used capacity and assigned  
35 capacity for each link is used to draw conclusions

- 5           in terms of needed extensions and changes of the  
          network, respectively.
20.   Traffic data evaluation method according to claim  
      19,  
10       characterized in that the step to draw conclusions  
          in terms of needed extensions and changes of the  
          network comprises a statistical analysis of  
          source/destination node pairs to decide on the  
          insertion of further nodes and links into the  
15       network.
21.   Traffic data evaluation method according to one of  
      the claims 10 to 20,  
      characterized in that it further comprises a step to  
20       visualize the network load for a network operator  
          with respect to each link and direction,  
          respectively.
22.   Traffic data evaluation method according to claim  
25       21,  
      characterized in that the step to visualize the  
      network load uses a geographical map, a topology map  
      and bar charts, respectively.
- 30   23.   Traffic data evaluation method according to one of  
          the claims 10 to 22,  
          characterized in that it also comprises a warning  
          step being activated after a long time virtual  
          overload situation in the network.

- 5 24. Traffic data evaluation method according to one of the claims 10 to 23, characterized in that it further comprises the step of insertion and exclusion of nodes and links into the virtual network, respectively.


1 / 14

Fig. 1

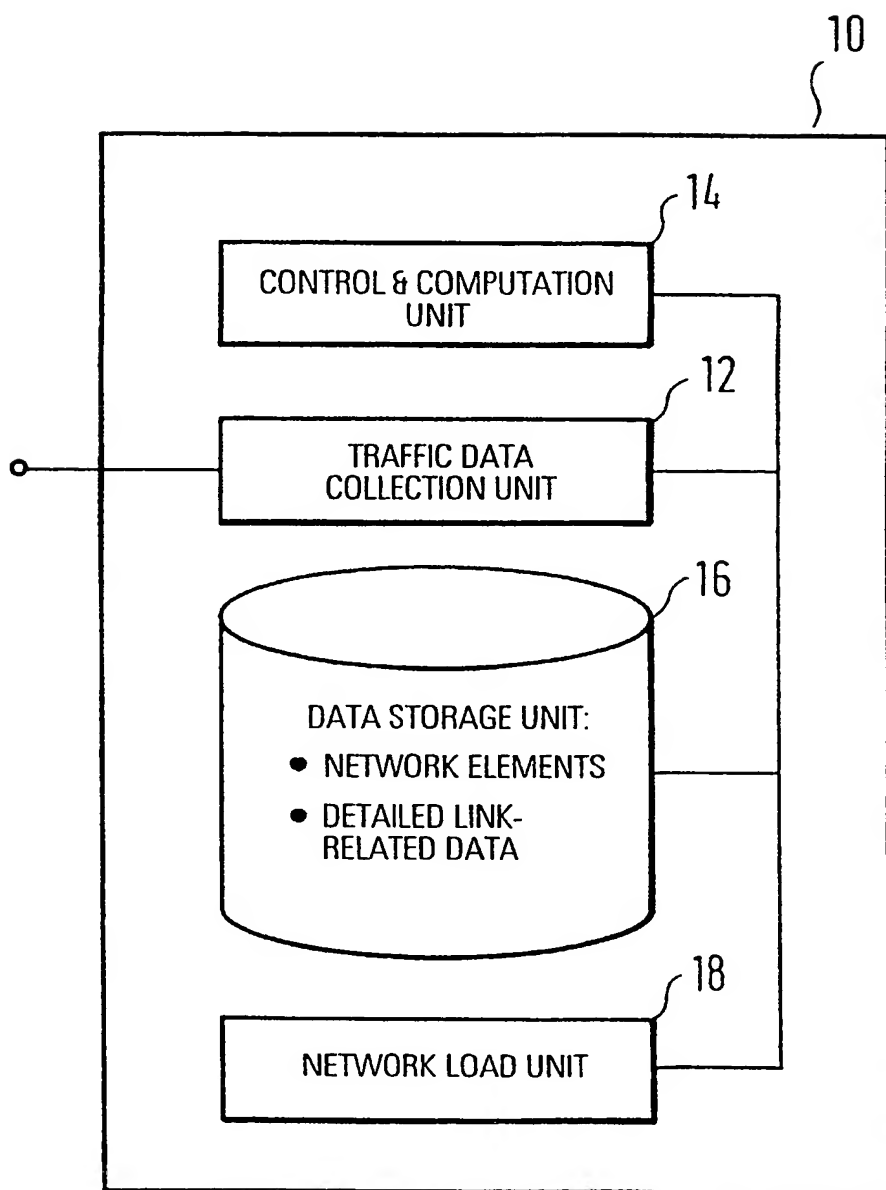


2 / 14

Fig. 2

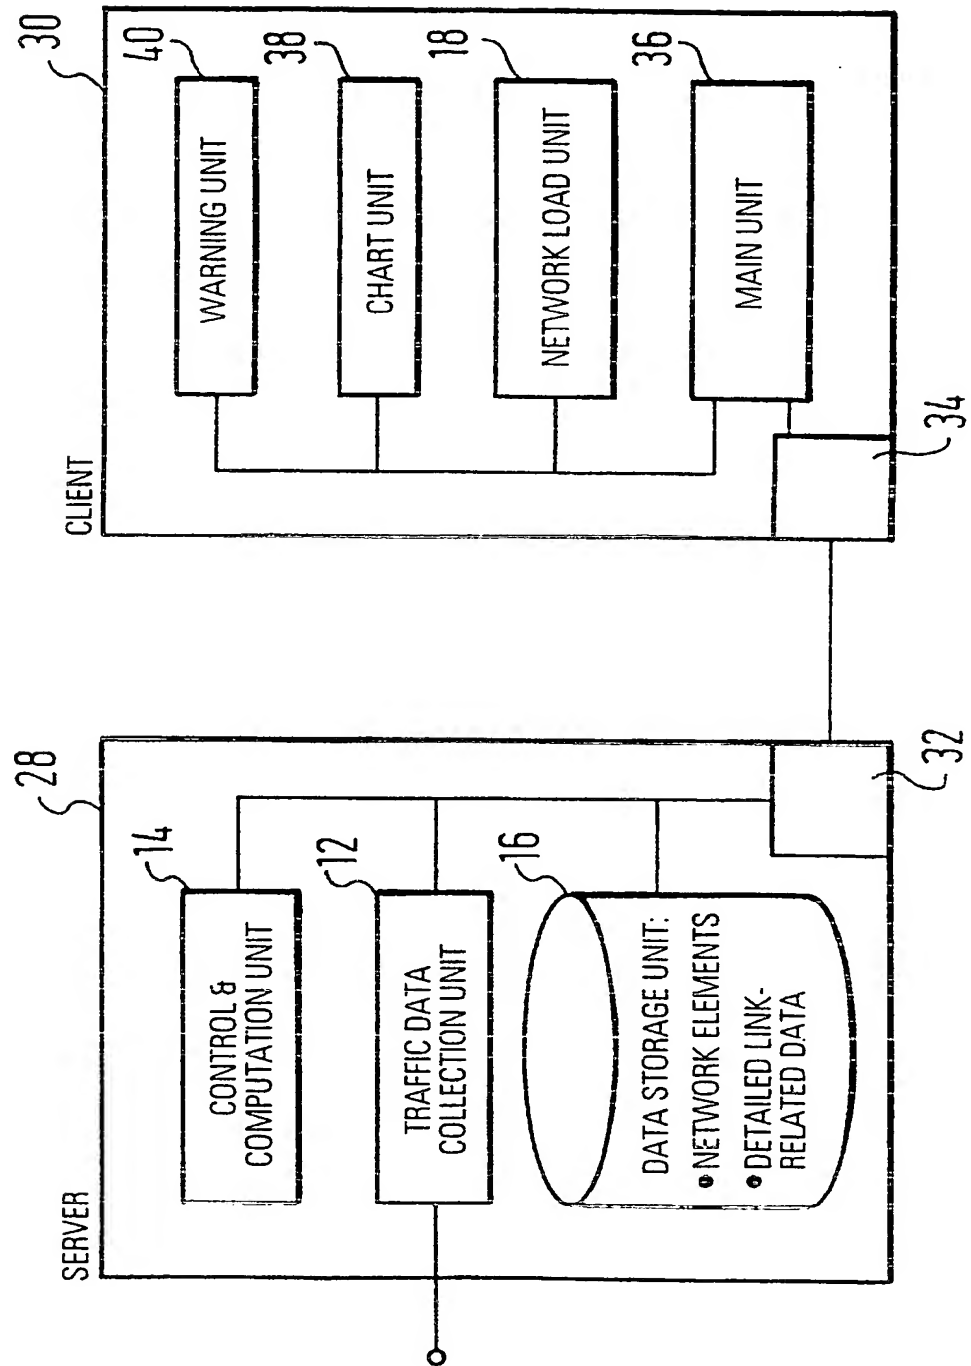


3 / 14

Fig. 3

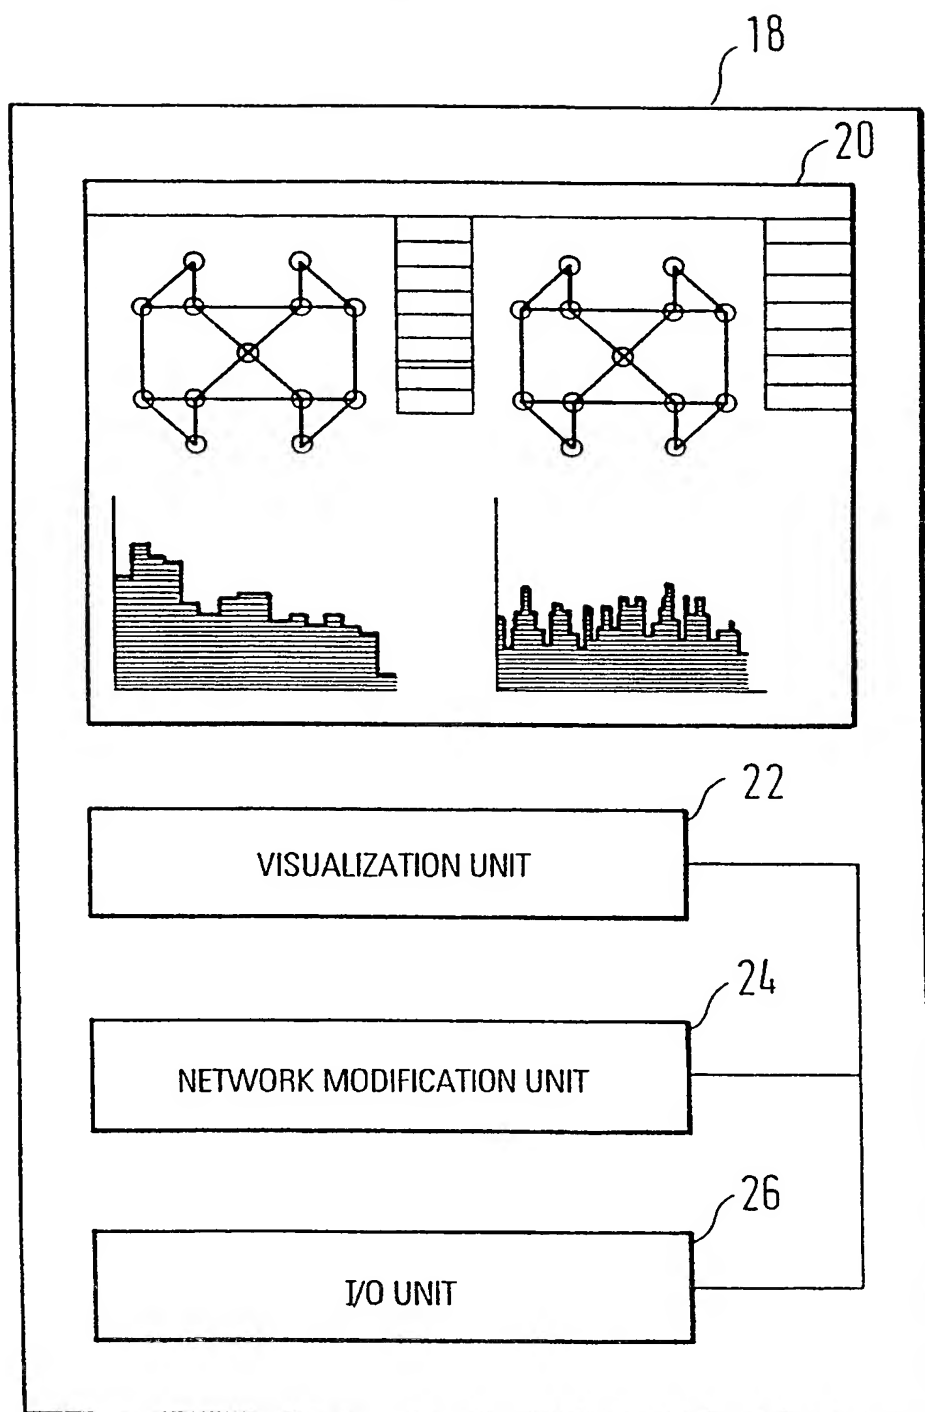


4 / 14

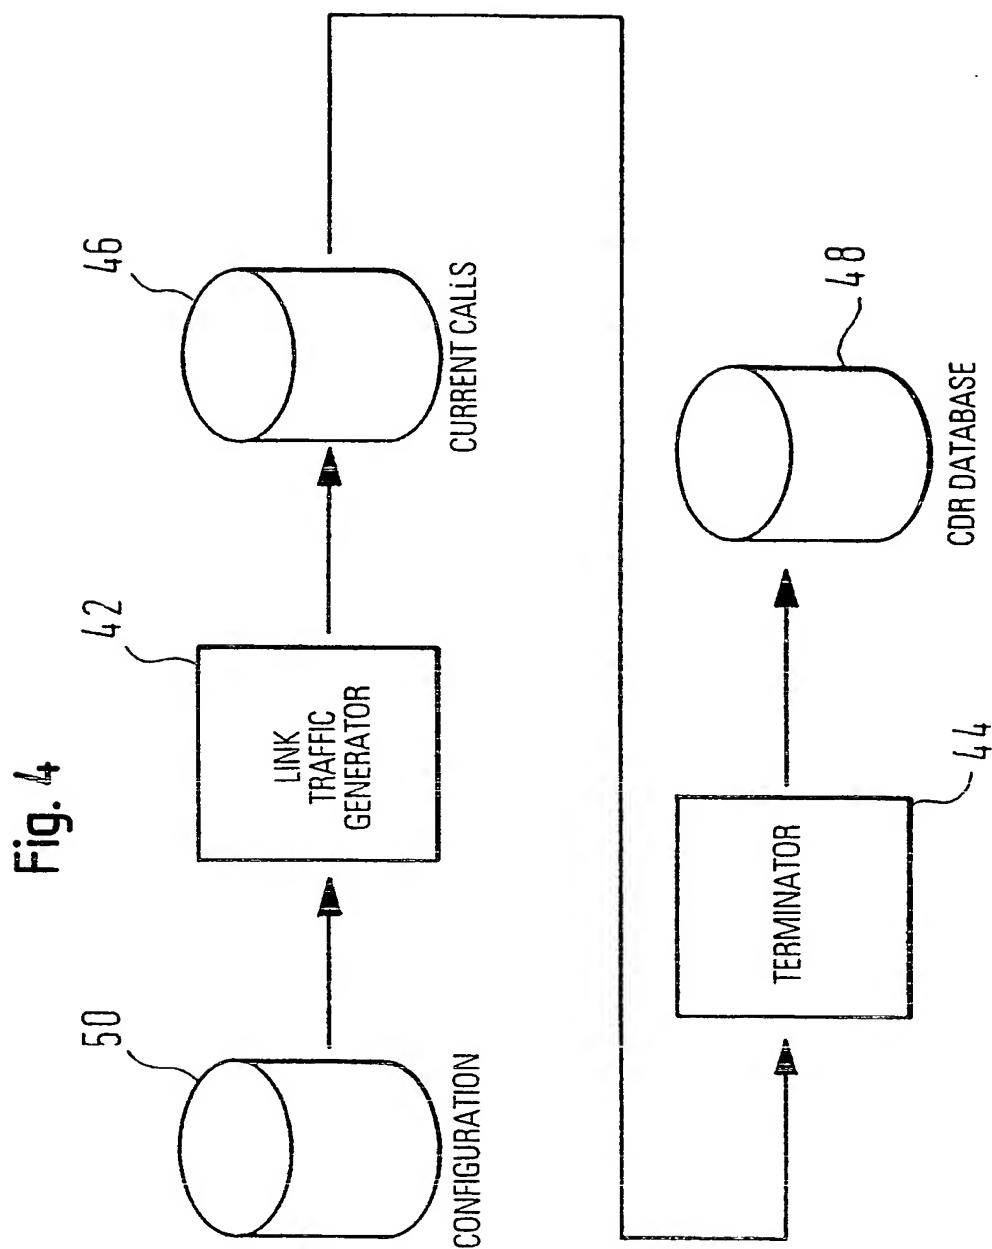




5 / 14

Fig. 5

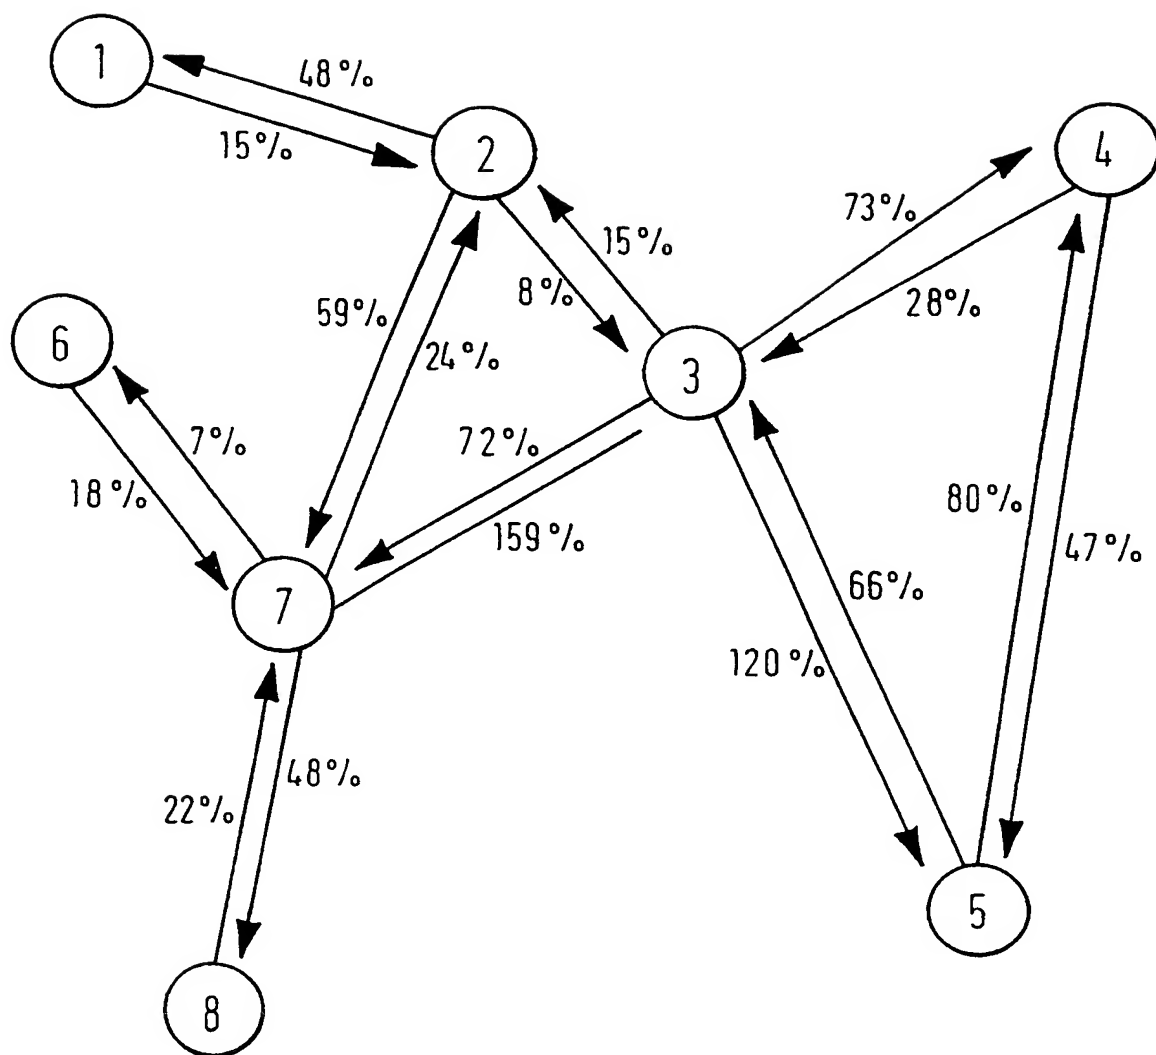

6 / 14

Fig. 6

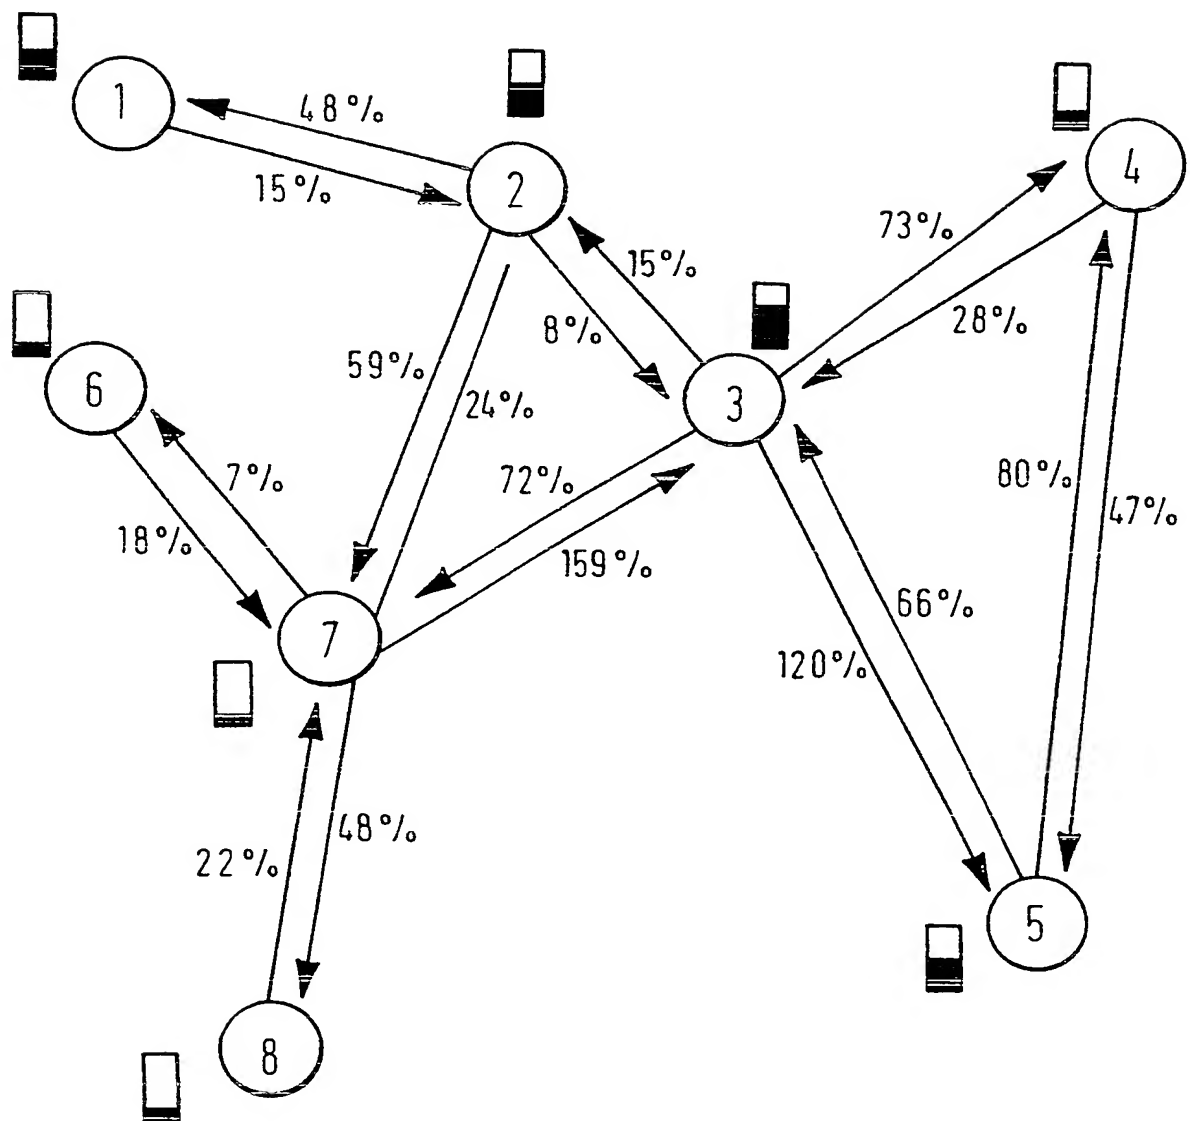

7 / 14

Fig. 7 a




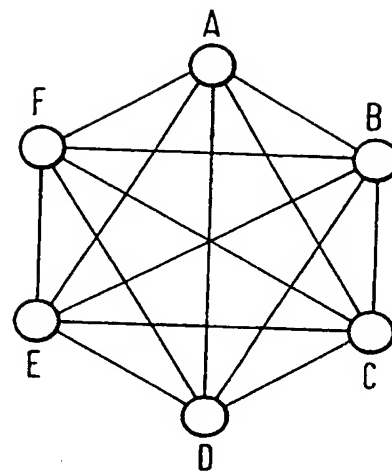


Fig. 7 b

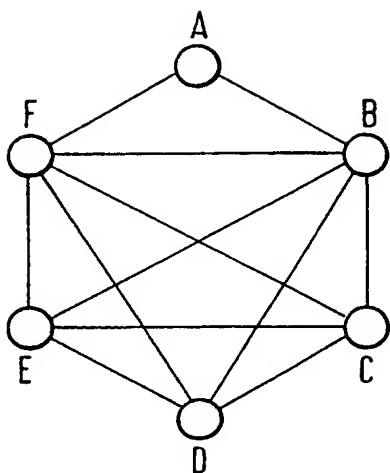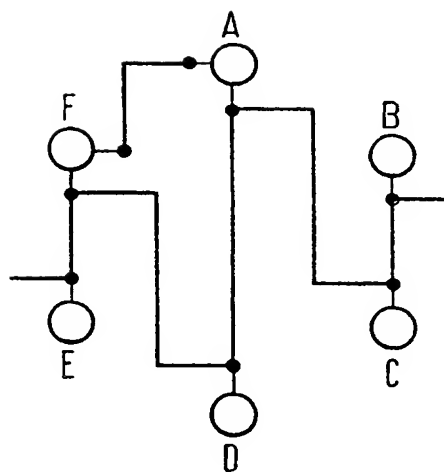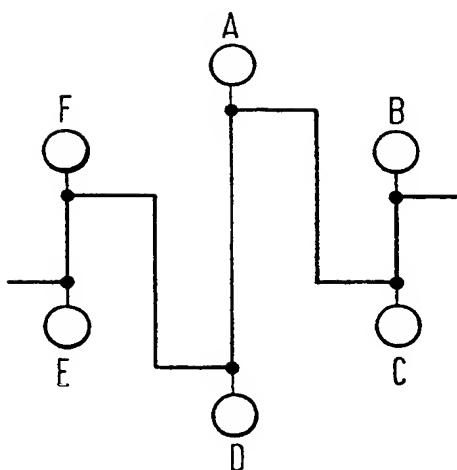

8/14

Fig. 7 c






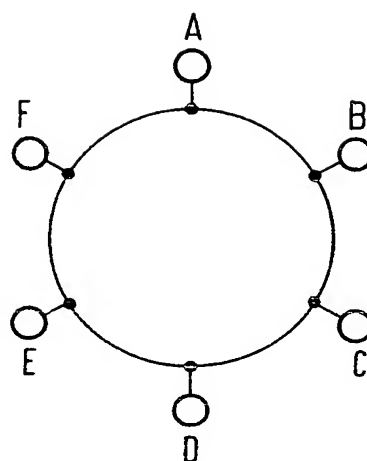


Fig. 7 d

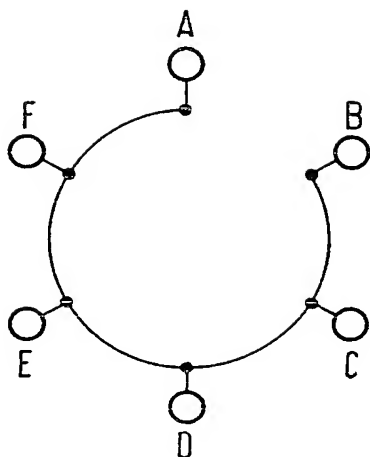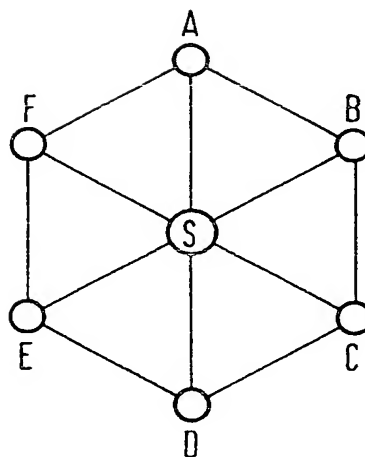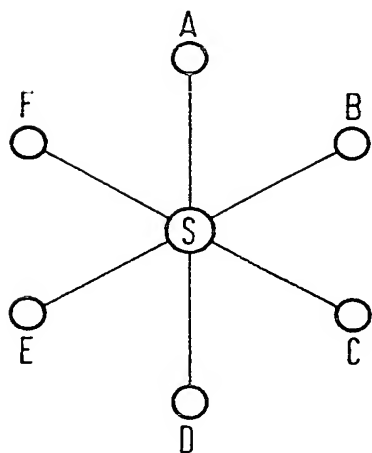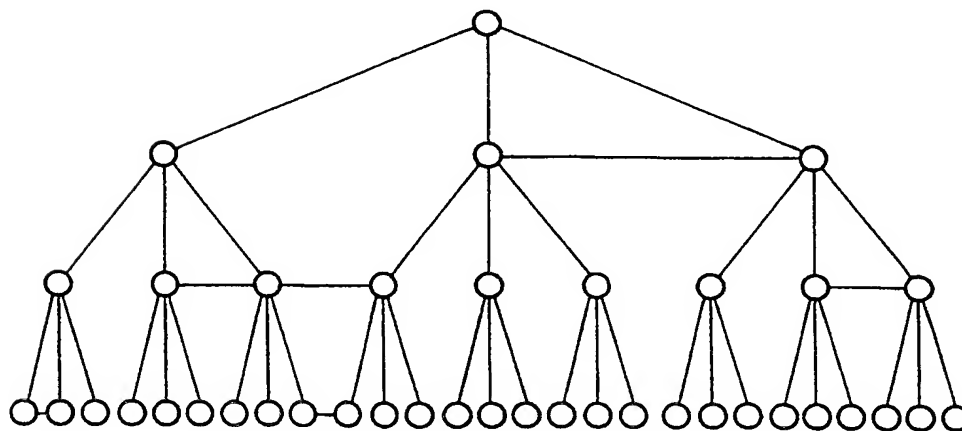


9/14

Fig. 7 e

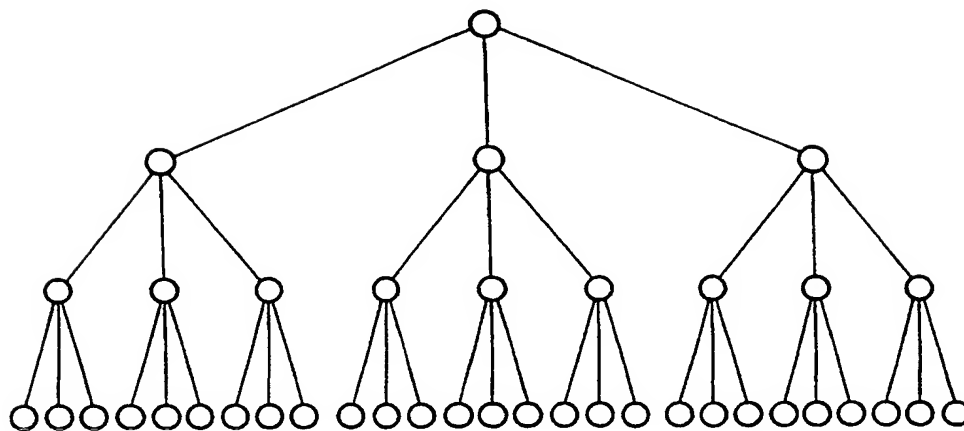

10/14

Fig. 8

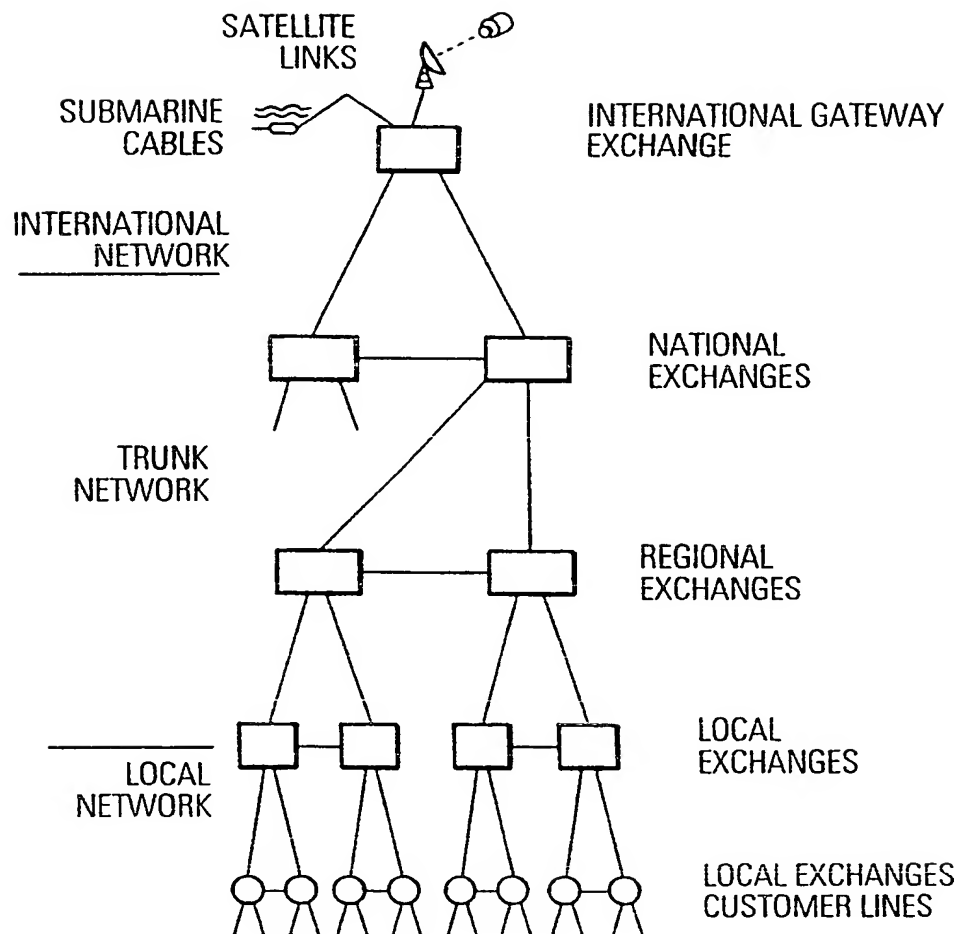

11/14

Fig. 9


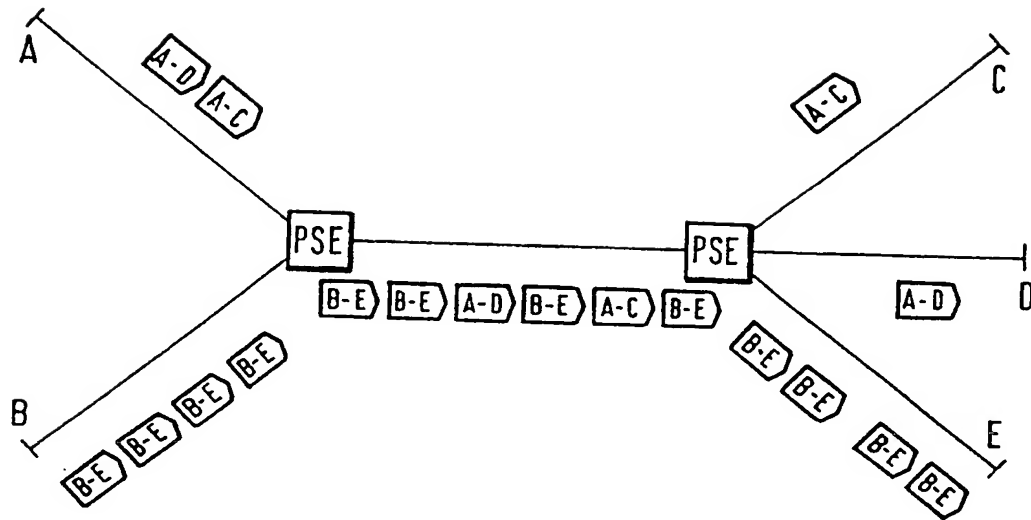


Fig. 10

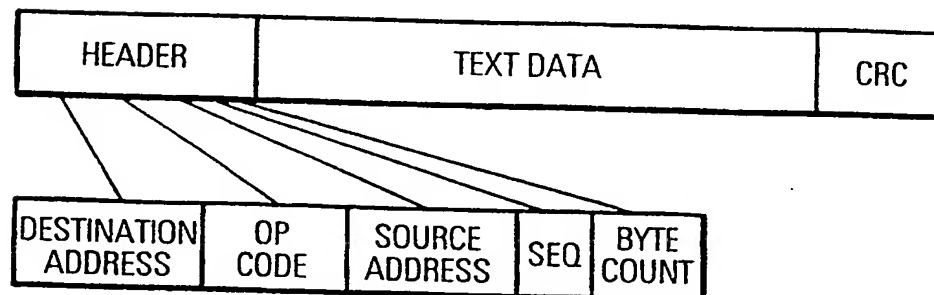

12 / 14


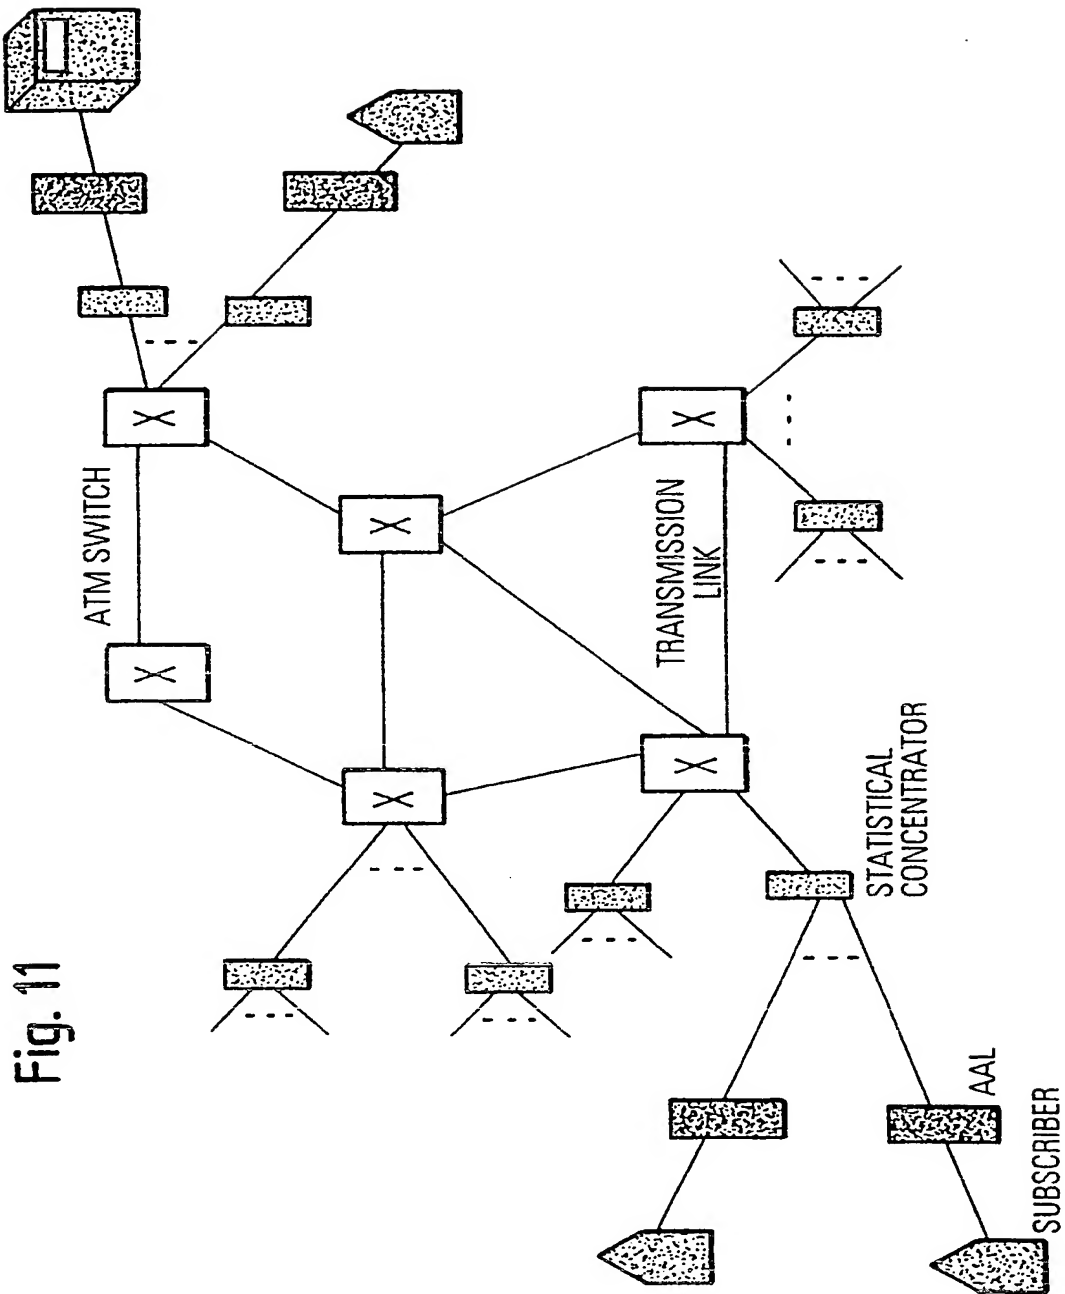


Fig. 11



13 / 14

Fig. 12

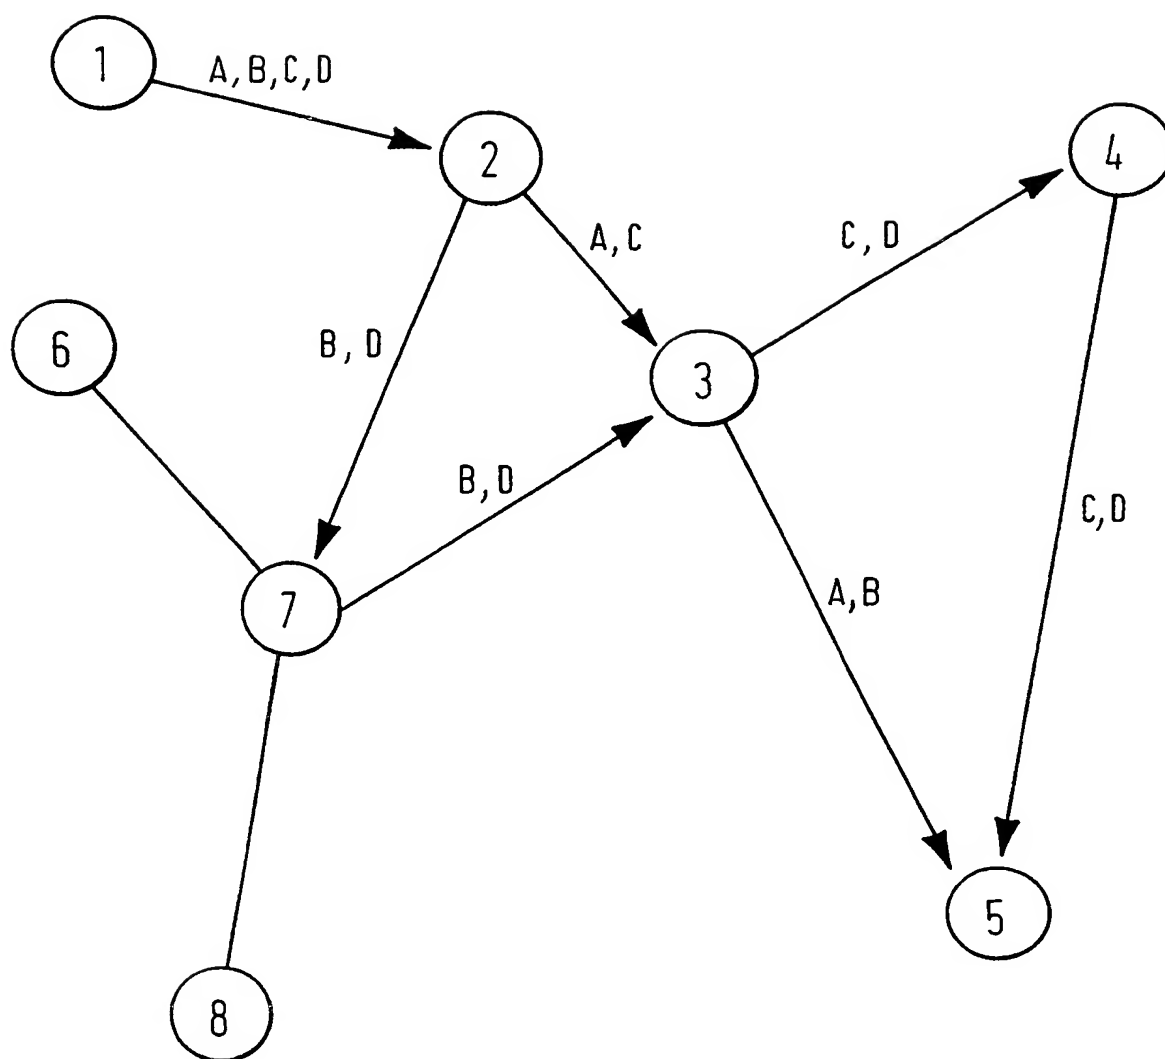

14 / 14

Fig. 13


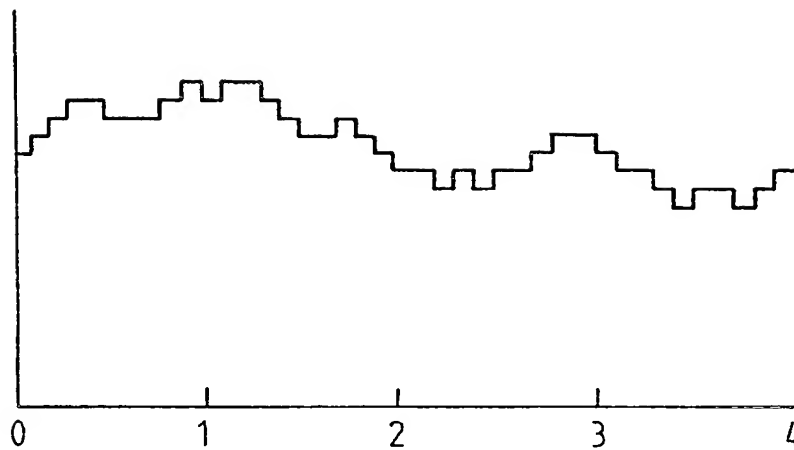


Fig. 14

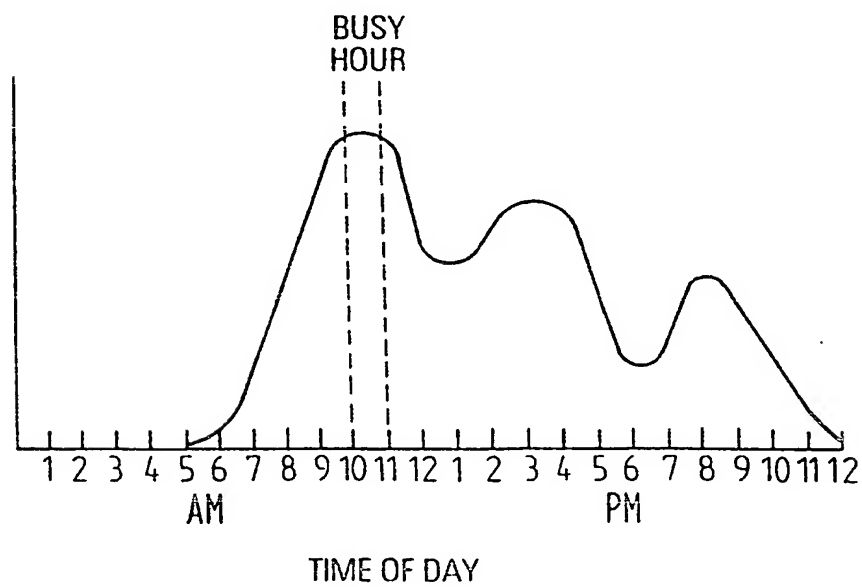

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/06716

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04L12/26 H04L12/24

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04Q G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 598 532 A (LIRON MOSHE) 28 January 1997 see column 2, line 59 - column 5, line 43 see claims 1-9 ---	1-24
A	WO 92 05485 A (CABLETRON SYSTEMS INC) 2 April 1992 see page 4, line 10 - page 9, line 5 see page 10, line 16 - line 31 see page 15, line 18 - page 16, line 24 see page 19, line 4 - line 14 see page 30, line 4 - page 32, line 4 see claims 1-13 ---	1-24
A	US 5 680 326 A (BENGSTON LEE DENNIS ET AL) 21 October 1997 see column 2, line 29 - line 67 see column 7, line 63 - column 8, line 49 -----	1-24

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

3 March 1999

Date of mailing of the international search report

17/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 opo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Karavassilis, N

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/06716

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5598532	A	28-01-1997	NONE	
WO 9205485	A	02-04-1992	AT 154850 T	15-07-1997
			AU 681972 B	11-09-1997
			AU 2722595 A	21-09-1995
			AU 682272 B	25-09-1997
			AU 685335 B	15-01-1998
			AU 4063295 A	04-04-1996
			AU 659101 B	11-05-1995
			AU 8620491 A	15-04-1992
			DE 69126666 D	31-07-1997
			DE 69126666 T	12-02-1998
			EP 0549677 A	07-07-1993
			EP 0737920 A	16-10-1996
			EP 0737921 A	16-10-1996
			JP 6501118 T	27-01-1994
			US 5295244 A	15-03-1994
			US 5504921 A	02-04-1996
			US 5559955 A	24-09-1996
			US 5751933 A	12-05-1998
			US 5727157 A	10-03-1998
			US 5261044 A	09-11-1993
			US 5436909 A	25-07-1995
			US 5812750 A	22-09-1998
US 5680326	A	21-10-1997	CA 2224733 A	09-01-1997
			EP 0871937 A	21-10-1998
			WO 9701143 A	09-01-1997